

TECHNICAL SPECIFICATION


CABLE TYPE **MR-400 COAXIAL CABEL**

STRUCTURE

Conductor	Composition (No./mm)	1/2.74 mm	
	Material	Copper Cover Aluminum Wire	
	Outside Diameter (mm)	2.74±0.03 mm	
Insulation	Material	Foamed Polyethylene	
	Thickness (mm)	2.3 mm	
	Nom. Diameter (mm)	7.24±0.15 mm	
Shield	Material	Double Aluminum Foil	Tinned Copper Wire
	Construction	0.038mm	24×7/0.16 mm
	Diameter (mm)	0.16±0.008 mm	
	Coverage	93 %	
Jacket	Material	PVC	
	Diameter	10.3±0.20 mm	
	Color	Black	
Printing			

ELECTRICAL CHARACTERISTIC

Impedance	Ω	50±3						
Insulation Resistance	MΩ/km	1000 ↑						
Capacitance	pF/M	79±3						
Attenuation	Frequency(MHz)	30	150	450	900	1500	2500	5800
	dB /100M	2.2	5.1	8.9	12.8	16.8	22.3	35.5

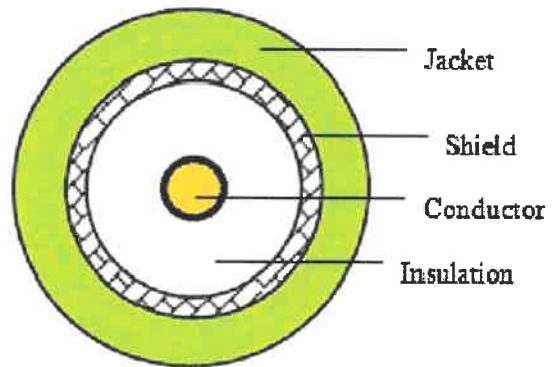

DRWN.	N. Y Ching	DRWN. NO:
CHKD.	Charles Lu	
APPD.	L.D Chang	Date:2020/5/5