

Glassfibre end fed dipole antenna 420-470 MHz

DESCRIPTION

A rugged and durable UHF omni antenna designed for Telemetry, Paging and PMR/Trunked Radio applications. Housed inside a high-strength glass fibre shroud, the antenna includes an integrated mounting clamp allowing easy installation on poles or horizontal rails. The robust antenna design ensures reliable operation in harsh environmental conditions.

- Former Skymasts brand product.

SPECIFICATIONS

Electrical	
Frequency	420 - 470 MHz
Omni Deviation	< ± 0.5 dB
Polarisation	Vertical
3 dB Beamwidth, E-Plane	80 °
3 dB Beamwidth, H-Plane	Omnidirectional
Impedance	50 Ω
Gain	0 dBd (2.2 dBi)
VSWR	< 1.5:1
Max. Input Power	100 W
Antistatic Protection	All metal parts DC-grounded (Connector shows a DC-short)
Mechanical	
Radiating Element(s)	11 mm dia brass tube
Connection(s)	N(f) on 500mm RG213/U cable
Radiator Feed	PTFE dielectric coaxial cable
Radome Material / Colour	GRP tube grey, 26mm dia.
Length	640 mm / 25.20 in.
Wind Load	21 N (160km/h)
Corrosion Protection	Surtec 650
Weight	0.5 kg / 1.10 lb
Mounting	Integral mounting clamp to fit 38 - 50 mm dia. pipe or horizontal rail


ORDERING

Type	Product No.	Description	Frequency
Glassfibre end fed dipole antenna 420-470 MHz	S.EFX-445	0.5m cable termination	420 - 470 MHz
Glassfibre end fed dipole antenna 420-470 MHz	S.EFX-445-FS	Fixed socket in base	420 - 470 MHz



DIAGRAM

RADIATION PATTERNS

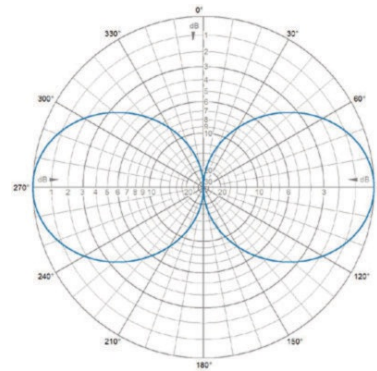


E-Plane | 445 MHz

MOUNTING & DIAGRAMS



Antenna Mounting

RADIATION PATTERNS

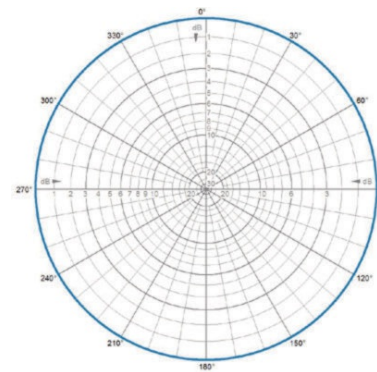

H-Plane | 445 MHz

