



FREQUENCY INDEPENDENT DATA

Description:	directional yagi
Frequency:	880-960/1710-2170 MHz
Impedance:	50 ohm
Gain:	6/8 dBi
H -3 dB:	162/126°
E -3 dB:	73/68°
F/B:	10/24 dB
Polarization:	vertical/horizontal
Connector:	N-female
VSWR:	< 1.5
Radome:	UV resistant ABS, RAL 7012, PU foam filling
Radiator:	copper
Passive elements:	coated aluminium
Attachment:	Ø 35-60 mm, aluminium alloy bracket, stainless steel V-bolts and self-locking nuts
Temperature:	-40°C - +80°C
IP:	67

- combination of durability, light weight and low wind load
- radome enclosed radiator
- IP67 proof construction
- all electromechanics moulded inside of closed cell PU foam
- integrated impedance compensation
- integrated RF choke

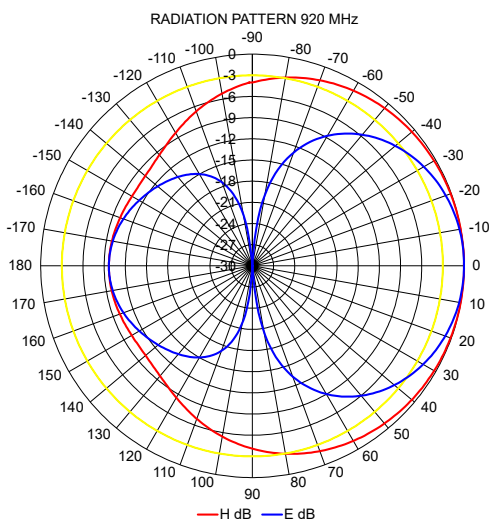

HCM 081LA32 037EA00

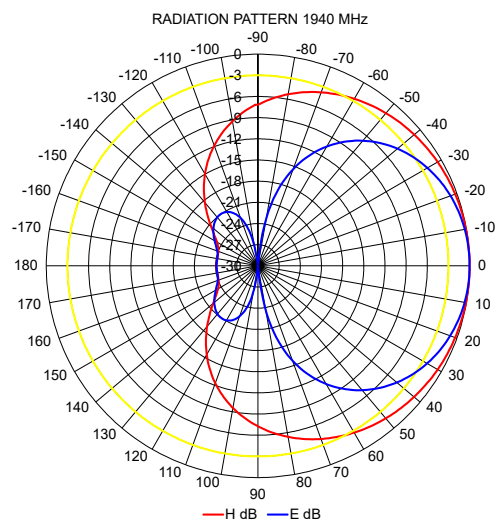

HCM 063LA06 034EA09



RoHS
COMPLIANT

CompleTech
ComAnt[®] -antennas by CompleTech, Finland